

### STRUCTURE

Total Thickness	1.20	mm
No. of Plies	1	
Fabric	Polyester	
Weft	Rigid	
Weight	1.20	kg/m <sup>2</sup>
Constant Temp. °C	- 10 / 90	
Intermittent Tem. °C	- 15 / 110	

#### 1 Top cover

Thickness	0.60	mm
Material	PU	
Colour	Brown 00	
Surface	Pattern SR	
Hardness	86	°ShA

#### 2 Internal cover

Material	-	
----------	---	--

#### 3 Bottom cover


Thickness	0.10	mm
Material	PU	
Colour	Natural	
Surface	Silent Impregnated	
Hardness	0	°ShA

### TENSIONS

	N/mm
Breaking load	90
Working load 1% elong.	8
Max. load at 1.5% elong.	12

### MIN. DRUM DIA.

mm





Flexing (F)	10
Back flexing (C)	30

### FASTENERS

25LL

### SPLICING PARAMETERS

Splice	Pressure Kp/cm <sup>2</sup>	Sup. Temp. °C	Inf. Temp. °C	Min Time	Top Cov. Flomil/ Film	Intern. Flomil	Sheet
DS/2	2.00	150	150	2	-	-	18
DS	2.00	150	150	2	-	-	2




The splice parameters are for orientation only as they depend on the type of press and the thickness of the plates used.



We recommend carrying out a trial run with pieces of the same belt before splicing the belt itself.

Time starts when the press has reached the stated temperature.

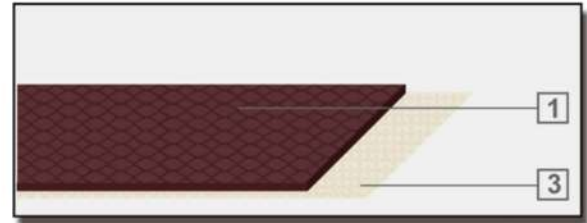

### PROFILES APPLICATION

Profiles on top cover	Yes
Profiles on bottom cover	Yes
Runer sidewalls	No

### SPECIAL CHARACTERIST.

<b>FDA</b>	FDA Food Grade
<b>A</b>	Animal Oils & Grease Resistant
<b>V</b>	Vegetal Oils & Grease Resistant
<b>AB</b>	Excellent Abrasion Resistant
<b>SF</b>	Silent Fabric

### SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Trough application	No

### FRICTION COEFF. BOTTOM COVER

On steel Din./Est.	0.13 / 0.15
On wood Din./Est.	0.19 / 0.27
On plastic Din./Est.	0.16 / 0.21

### REMARKS

Longitudinal splice	Yes
Max. manufacturing width	3000 mm
Last modified	2021.01.14