

STRUCTURE

Total Thickness	1.40	mm
No. of Plies	1	
Fabric	CO	
Weft	Flexible	
Weight	1.40	kg/m ²
Constant Temp. °C	- 10 / 90	
Intermittent Tem. °C	- 15 / 110	



1 Top cover		
Thickness	-	mm
Material	CO	
Colour	Natural	原色
Surface	Textured	
Hardness	0	°ShA

2 Internal cover		
Material	-	

3 Bottom cover		
Thickness	0.60	mm
Material	PU	
Colour	White 00	
Surface	Pattern Y1	
Hardness	86	°ShA

TENSIONS	N/mm
Breaking load	20
Working load 1% elong.	2
Max. load at 1.5% elong.	3

MIN. DRUM DIA. mm



	Flexing (F)	10
	Back flexing (C)	10

FASTENERS

25LL

SPLICING PARAMETERS

Splice	Pressure Kp/cm ²	Sup. Temp. °C	Inf. Temp. °C	Min Time	Top Cov. Flomil/ Film	Intern. Flomil	Sheet
DS/2	2.50	150	155	3	-	-	18
DS	2.00	150	155	1	-	-	2




The splice parameters are for orientation only as they depend on the type of press and the thickness of the plates used.



We recommend carrying out a trial run with pieces of the same belt before splicing the belt itself.

Time starts when the press has reached the stated temperature.

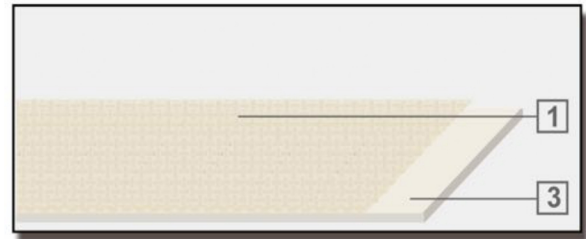

PROFILES APPLICATION

Profiles on top cover	Yes
Profiles on bottom cover	Yes
Runer sidewalls	No

SPECIAL CHARACTERIST.

FDA	FDA Food Grade
A	Animal Oils & Grease Resistant
V	Vegetal Oils & Grease Resistant

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Trough application	Yes

FRICTION COEFF. BOTTOM COVER

On steel Din./Est.	0.60 / 0.65
On wood Din./Est.	0.65 / 0.70
On plastic Din./Est.	0.70 / 0.73

REMARKS

Longitudinal splice	No
Max. manufacturing width	3000 mm
Last modified	2023/7/27